

Signal Data Reproducer

BACKGROUND INFORMATION

Brief Description: The Micro USA Signal Data Reproducer accepts two serial RS-422 inputs and generates sixteen (16) RS-422 outputs for each of the inputs.

It has an activity indicator for each of the input channels.

The unit provides overvoltage and current protection for each of the input and output connections.


Model No.: RP-401A/UYH

NSN: 7025-LL-H7D-1330

Part No: A90160002M



Complete Assembly

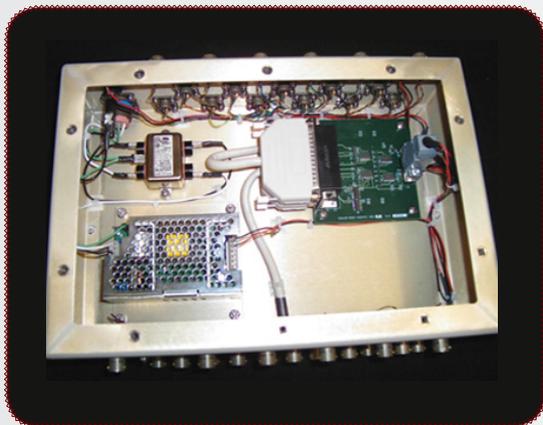

Top View Open

Specifications

- Two independent Serial input ports
- Sixteen output channels per input.
- Power on indicator
- Overvoltage and Current protection on all connections
- Channel Activity Indicator
- Voltage: 115 VAC 60 Cycle, < 100 W
- Meets Shock and Vibration requirements
- Dimensions – 3.5”H x 14.5”W x 8.5”D
- Weight – 6 lbs

Environmental:

Temperature

0 to 50 Deg C (Operating)

-40 to +100 Deg C (Storage)

Humidity – 0 to 95% relative,

Non-condensing

Cooling – Natural Convection

Features:

Manufacturer: Micro USA, Inc.

Cage Code: 02UU8